

Hardware Spec


PARAMETER	DETAIL
Weight (Lock only)	4.2 Lbs
Working Current	250 mA
Idle Current	15 μ A
Motor Running Time	0.4 Second
Working Voltage	4.2-6.4V
Low Battery Warning	4.2V
Power Source	4 AA Alkaline Battery
Backlit Keypad	Protected use only keypad
Handle	Non handed
Door Thickness	1 3/8" to 2"
Keyway	SC 6 Pin
Lock Dimension	Front 6"(H)x2.5"(W)x3"(L) Back 6"(H)x2.5"(W)x2.5"(L)
Package Dimension (1ps)	10 x 8 x 3 1/4"
Package Dimension 6pcs/CTN)	16 1/2 x 10 1/2 x 10 1/2"
Package Weight (1)	5 Lbs
Weight (6pcs/Box)	30 Lbs




Software Spec

Description	Non-software
Audit Trail	No
Users	299
Timed Operation	Yes
Remote Access	No
Storehouse/Classroom Mode	Yes
One Time User	Yes
Software Package	No
Lock from Inside	No
Set Up Method	Keypad
Daylight Saving	Yes
Lock Out Function	Yes

Regular Latch




Deadbolt Mortise

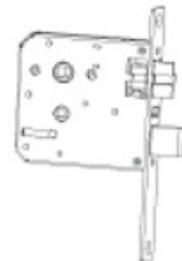

Mortise Spec

3/4" throw heavy duty deadbolt with anti-saw hardened pins
Rustproof heavy duty 2 3/8" backset lock case
Individual spring to prevent lever sag, easily reversible
Forged brass lever handles exceed requirements of ADA
Auxiliary latch bolt
Heavy Duty 1/2" latch bolt with anti-friction latch, easily reversible
Interconnected Deadbolt Mortise:
While unlocked turn the handle up to enable (lock) the deadbolt, or turn the handle down to disable (unlock) the deadbolt

**Interconnected
Deadbolt Mortise
Pull handle up to lock
the lock**

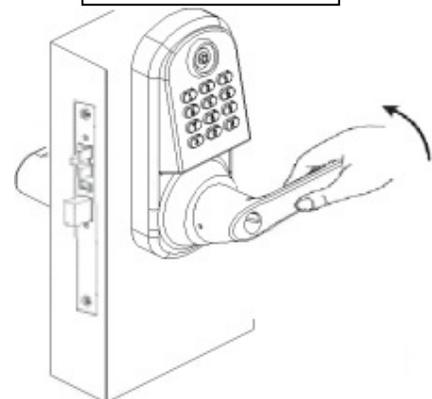

Ordering Information:

PART	DESCRIPTION
E5RFKSC	E5 RF Non-Software
D-MC	Master Cylinder
E51CHDL	Interchangeable Core
E5RF	Proximity Card

Feature List:

- Low Battery Warning
- Auto Lock/Unlock
- Master Code/Construction Code
- One Time Service Code
- Delete Individual Code/Card by Index
- Scheduled or Set Passage Mode/Storehouse Mode
- Lockout Mode
- Daylight Saving Available
- Timed User
- Timed Lock Operation